Outline XS

OUT 035 100 014A 8040 10 99 OP 40 TK

Recessed Linear Luminary





Luminaire GroupLinearMounting TypeRecessed

Luminary ColorRAL 9010 - RAL 9005HousingAluminum extruded profile

Optics Opal Diffuser
Light Source LED
Electrical Protection Class CLASS II
Operating Temperature -20°C / +40°C

Luminous Flux980Consumption Power14Luminaire Efficiency70 lm/WColor Rendering (CRI)>80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung


Input Voltage / Frequency 220-240 V AC 50/60 Hz


 Power Factor
 >0.9

 Surge
 1kV

 THD (AKIM)
 >%20

 LED life
 >70.000 hours

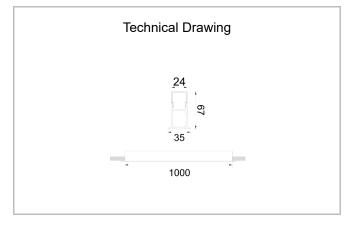

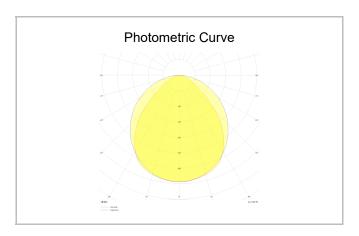

SKU	Product Code	Power (W)	Luminous	CRI	CCT (K)	Optics	Dimensions
			Flux (LM)				(mm)
	OUT 035 100 014A 8040 10 99 OP 40 TK	14	980	>80	4000	120° / Opal	1000x35x67