Dimple Drums

DDR 060 025 048S 9040 10 99 OP 40 00

Surface Mounted Surface Mounted Luminary





Luminaire GroupSurface MountedMounting TypeSurface Mounted

Luminary Color RAL 9006 - RAL 9005 - RAL

Housing 9010

Housing DKP Sheet
Optics Opal Diffuser
Light Source LED

Electrical Protection Class CLASS II
IP 40
IK 02

Operating Temperature -20°C / +40°C Luminous Flux 6290 Consumption Power 48 Luminaire Efficiency 135 lm/W Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 70.000 hours

Option On-Off / Dali / 1-10V / With

Emergency Kit



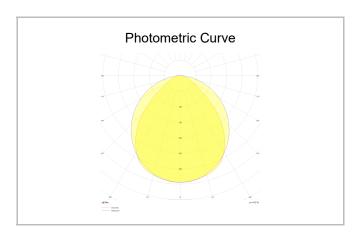

SKU	Product Code	Power (W)	Luminous	CRI	CCT (K)	Optics	Dimensions
			Flux (LM)				(mm)
	DDR 060 025 048S 9040 10 99 OP 40 00	48	6290	>80	4000	120° Diffuser	Ø650x250