
Eclips


ECL 050 005 027S 8040 10 99 PL 20 00

Surface Mounted Wall Mount Luminary

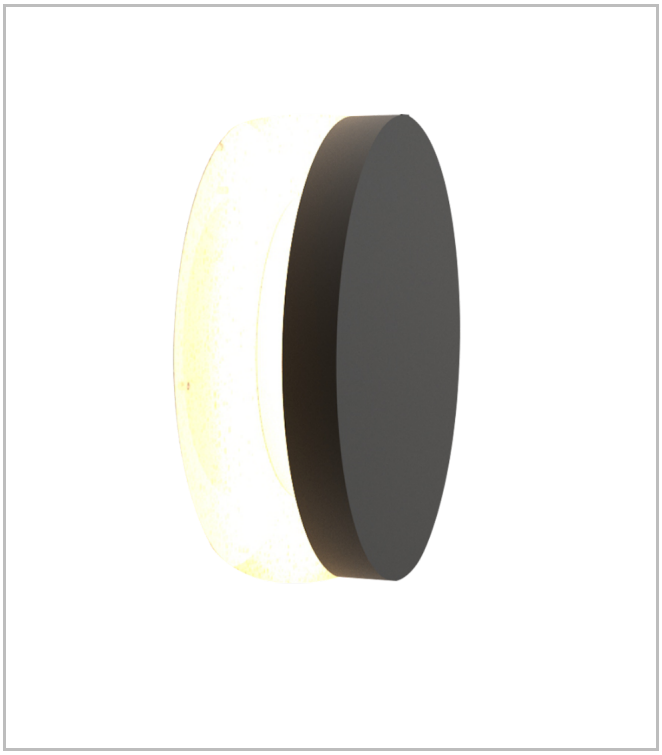

Luminaire Group	Wall Mount
Mounting Type	Surface Mounted
Luminary Color	RAL 9006 - RAL 9005 - RAL 9010
Housing	DKP Sheet
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
Operating Temperature	-20°C / +40°C
Luminous Flux	1890
Consumption Power	27
Luminaire Efficiency	70 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>50.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
18000228	ECL 050 005 027S 8040 10 99 PL 20 00	27	1890	>80	4000	180° Diffuser	Ø500x82