
Quilt


QUT 127 020 048A 8040 10 99 OP 20 00

Pendant Acoustic Solutions Luminary

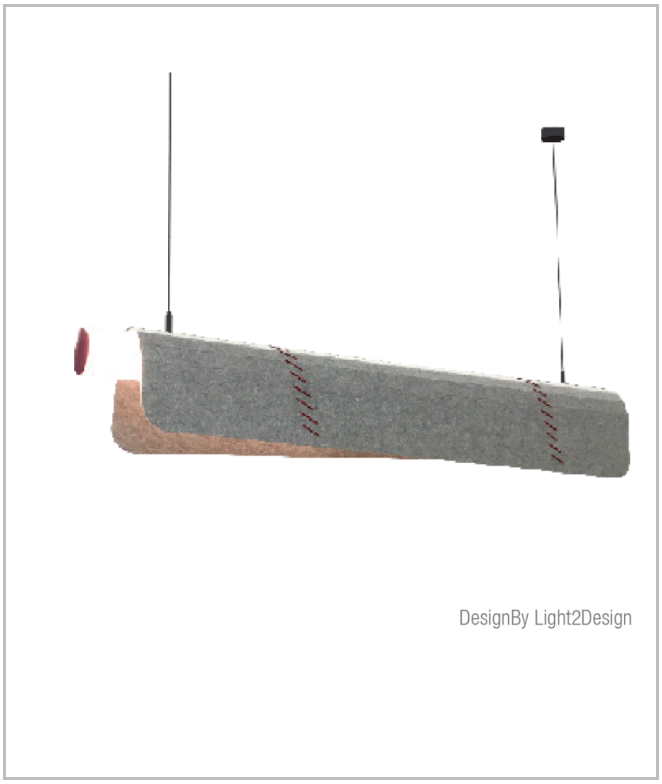


Luminaire Group	Acoustic Solutions
Mounting Type	Pendant
Luminary Color	RAL 9006 - RAL 9005 - RAL 9010
Housing	Acoustic Panel
Optics	Acrylic
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	4400
Consumption Power	48
Luminaire Efficiency	91,6 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	QUT 127 020 048A 8040 10 99 OP 20 00	48	4400	>80	4000	120° Acrylic	1267x200