Maldive M


MLD 006 010 009W 9040 10 30 SD 44 00 (1)

Rail Mounted Track Lighting Luminary




Luminaire Group	Track Lighting
Mounting Type	Rail Mounted
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	Aluminum Injection
Optics	15° 30° 40° Reflector
Light Source	LED
Electrical Protection Class	CLASS II
IP	44
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1080
Consumption Power	9
Luminaire Efficiency	120 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V

Technical Drawing

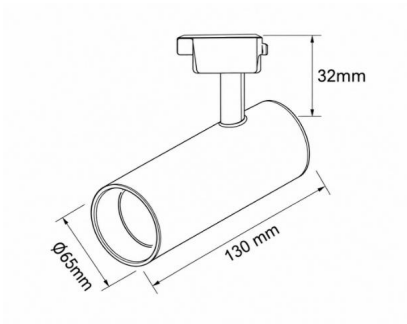

Photometric Curve



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
17000980□	MLD 006 010 009W 9040 10 30 SD 44 00 (1)	9	1080	>80	4000	40° Reflector	Ø60x100