


Eye S-M

EYE 005 013 004K 8030 10 10 LN 65 00




Pile and Ground Facade & Landscape Luminary

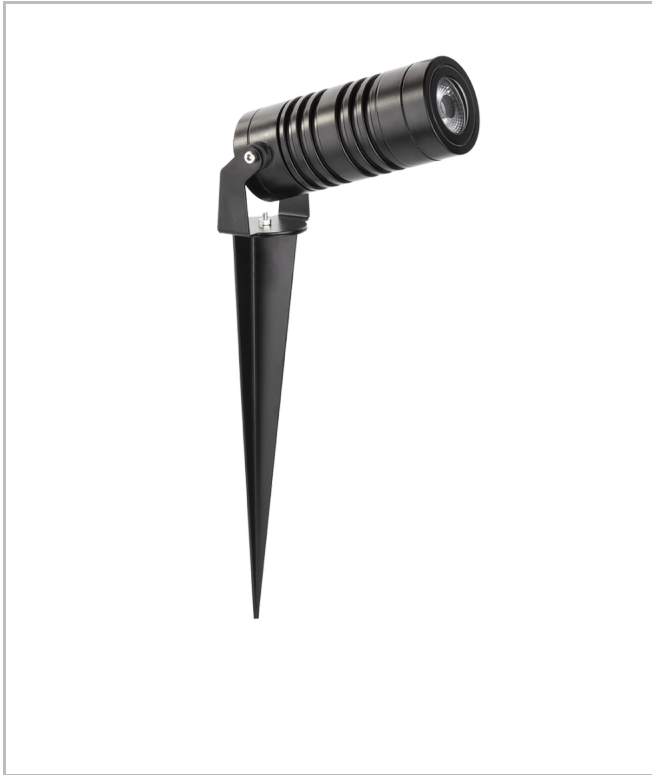


| | |
|--------------------------------------|--------------------------------------------|
| Luminaire Group | Facade & Landscape |
| Mounting Type | Pile and Ground |
| Luminaire Color | RAL 9006 - RAL 9005 - RAL 9010 |
| Housing | Aluminum Injection |
| Optics | 10° 25° 36° Lens |
| Light Source | LED |
| Electrical Protection Class | CLASS I |
| IP | 65 |
| IK | 02 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 320 |
| Consumption Power | 4 |
| Luminaire Efficiency | 80 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit |

Technical Drawing

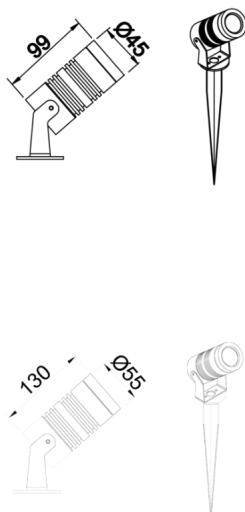

Photometric Curve


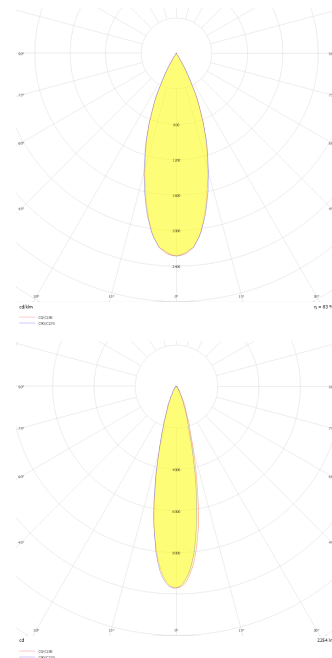


Eye S-M

EYE 005 013 004K 8030 10 10 LN 65 00



Pile and Ground Facade & Landscape Luminary

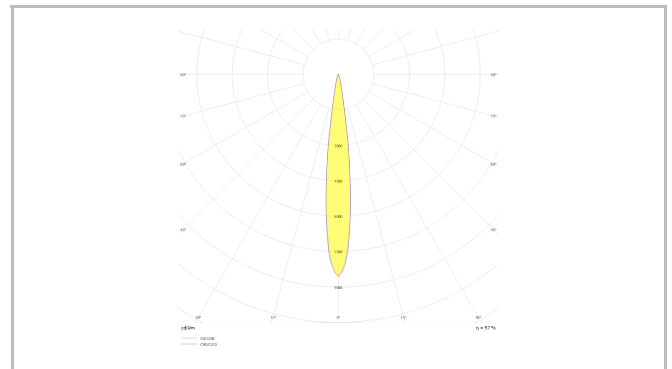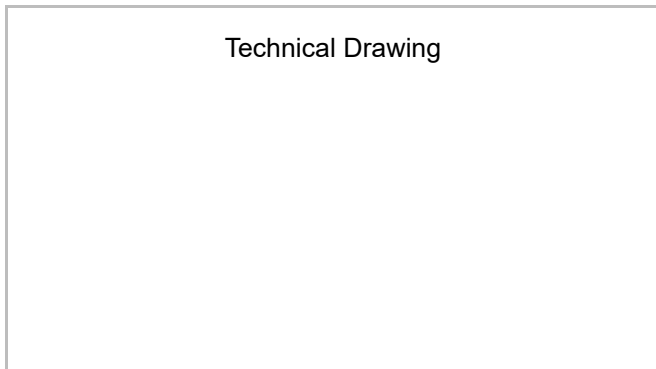

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|----------|-----------------|
| | EYE 005 013 004K 8030 10 10 LN 65 00 | 4 | 320 | >80 | 4000 | 10° Lens | Ø55x99 |