## **Eagle**

## EAG 4000 090 030M 8040 10 AS PM 66 00

Pole Mounted Park & Garden Luminary





Luminaire GroupPark & GardenMounting TypePole Mounted

Luminary Color RAL 9006 - RAL 9005 - RAL

9010

Housing Aluminum Injection

Optics PMMA Lens & Tempered Glass

Light Source LED CLASS II IP 66 IK 08

Operating Temperature -20°C / +40°C Luminous Flux 3900 Consumption Power 30

Luminaire Efficiency 130 lm/W Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz


 Power Factor
 >0.9


 Surge
 1kV

 THD (AKIM)
 >%20

 LED life
 >70.000 hours

 Option
 On-Off / Dali / 1-10V

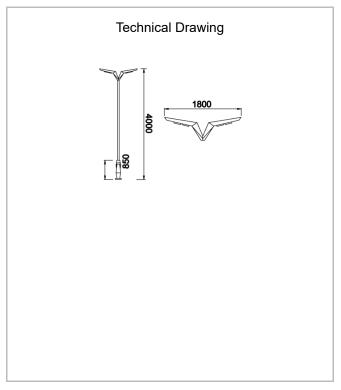

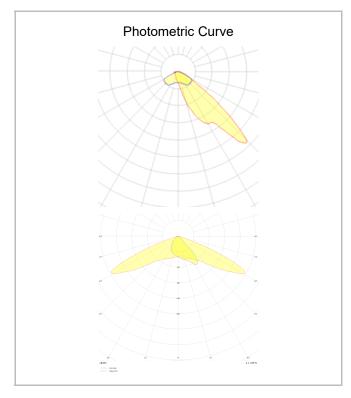

www.atellighting.com

## **Eagle**

## EAG 4000 090 030M 8040 10 AS PM 66 00

Pole Mounted Park & Garden Luminary



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	EAG 4000 090 030M 8040 10 AS PM 66	30	3900	>80	4000	AS° PMMA	4000x900