

Eagle

EAG 4000 090 100M 8040 10 AS PM 66 00




Pole Mounted Park & Garden Luminary




| | |
|--------------------------------------|--------------------------------|
| Luminaire Group | Park & Garden |
| Mounting Type | Pole Mounted |
| Luminaire Color | RAL 9006 - RAL 9005 - RAL 9010 |
| Housing | Aluminum Injection |
| Optics | PMMA Lens & Tempered Glass |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 66 |
| IK | 08 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 13000 |
| Consumption Power | 100 |
| Luminaire Efficiency | 130 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |
| Option | On-Off / Dali / 1-10V |

Technical Drawing



Photometric Curve

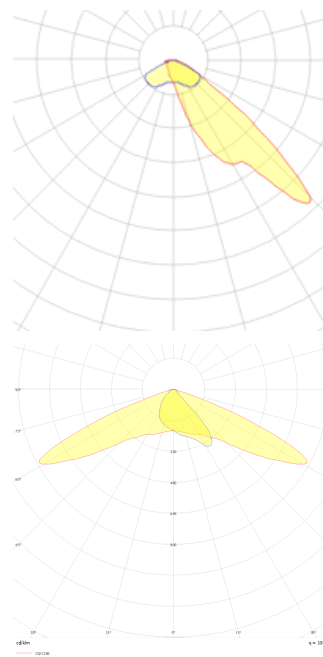

www.atellighting.com

Eagle

EAG 4000 090 100M 8040 10 AS PM 66 00



Pole Mounted Park & Garden Luminary

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|---------------------------------------|-----------|--------------------|-----|---------|----------|-----------------|
| | EAG 4000 090 100M 8040 10 AS PM 66 00 | 100 | 13000 | >80 | 4000 | AS° PMMA | 4000x900 |