

# Margarita S

MAR 011 009 025K 8030 10 40 LN 65 00




Floor Facade & Landscape Luminary




<b>Luminaire Group</b>	Facade & Landscape
<b>Mounting Type</b>	Floor
<b>Luminary Color</b>	RAL 9005 - RAL 9016
<b>Housing</b>	Aluminum Extrusion
<b>Optics</b>	15° 40° 90° Lens
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	65
<b>IK</b>	08
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	2000
<b>Consumption Power</b>	25
<b>Luminaire Efficiency</b>	80 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours

Technical Drawing



Photometric Curve

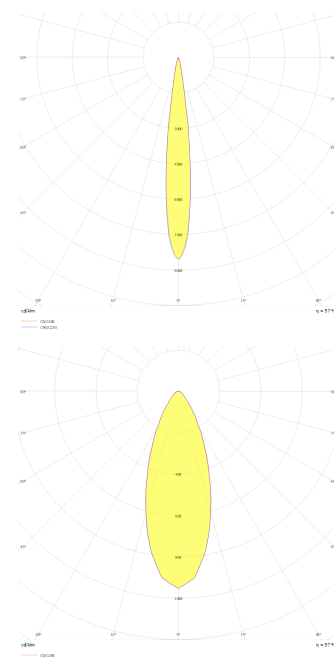


# Margarita S

MAR 011 009 025K 8030 10 40 LN 65 00



Floor Facade & Landscape Luminary

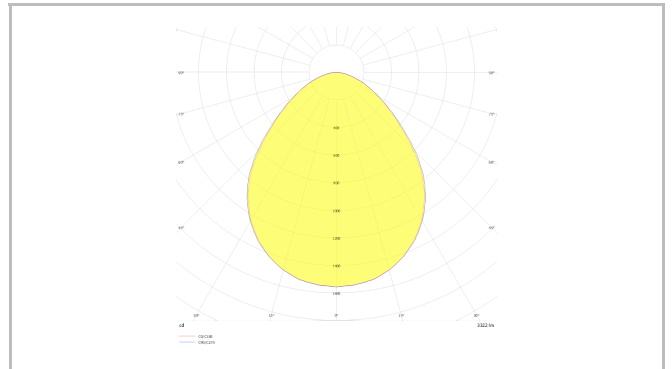

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	MAR 011 009 025K 8030 10 40 LN 65 00	25	2000	>80	4000	40° Lens	Ø119