

Glow 2X3



GLW 020 078 291S 8040 10 02 LN 66 00



Industrial Luminary



Luminaire Group	Industrial
Luminary Color	RAL 9005
Housing	Aluminum Extrusion Body
Optics	60° / 90° / 30x70° Lens
Light Source	LED
Electrical Protection Class	CLASS II
IP	66
IK	09
Operating Temperature	-20°C / +40°C
Luminous Flux	44627
Consumption Power	291
Luminaire Efficiency	153,36 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K / 3000K / 4000K / 6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit / Industrial / Tempered Glass

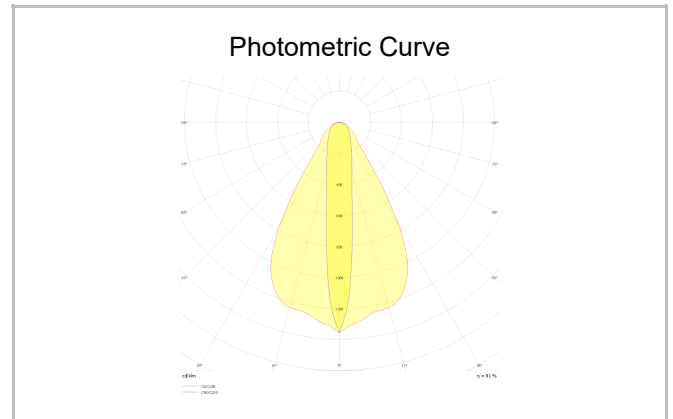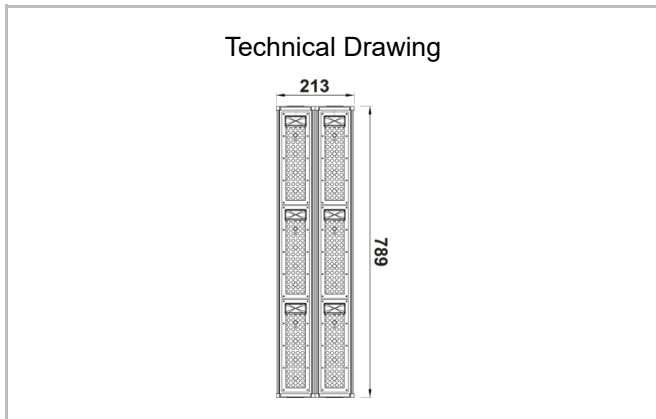

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	GLW 020 078 291S 8040 10 02 LN 66 00	291	44627	>80	4000	30°x70° Lens	789x213x81

www.atellighting.com