

Glow 3X



GLW 010 078 145S 8040 10 60 LN 66 00



Industrial Luminary



| | |
|--------------------------------------|---|
| Luminaire Group | Industrial |
| Luminary Color | RAL 9005 |
| Housing | Electrostatic Powder Coated Aluminum Extrusion Body |
| Optics | 60° / 90° / 30x70° Lens & Tempered Glass |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 66 |
| IK | 09 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 22237 |
| Consumption Power | 145 |
| Luminaire Efficiency | 153,36 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K / 3000K / 4000K / 6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | 100.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit / Industrial /Temperli Cam |

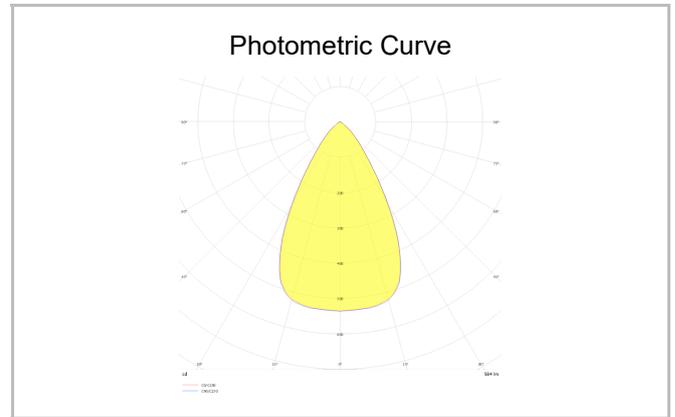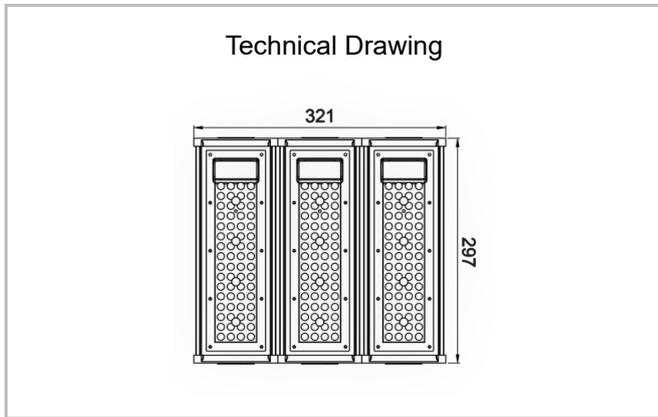

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|----------|-----------------|
| | GLW 010 078 145S 8040 10 60 LN 66 00 | 145 | 22237 | >80 | 4000 | 60° Lens | 293x321x81 |

www.atellighting.com