Obi S


OBI 010 013 009S 9040 10 15 SD 40 00 (1)

Surface Mounted Surface Mounted Luminary




Luminaire Group	Surface Mounted
Mounting Type	Surface Mounted
Luminary Color	RAL 9005 - RAL 9016
Housing	Aluminum Injection
Optics	15° 30° 40 °Reflector & Transparent Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	630
Consumption Power	9
Luminaire Efficiency	70 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

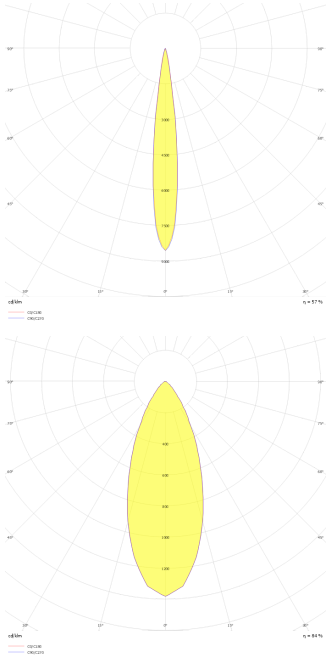

www.atellighting.com

Obi S

OBI 010 013 009S 9040 10 15 SD 40 00 (1)

Surface Mounted Surface Mounted Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
15003012	OBI 010 013 009S 9040 10 15 SD 40 00 (1)	9	630	>80	4000	30° Transparent Diffuser	Ø102x130