Obi M


OBI 013 020 018S 9040 10 30 SD 40 00

Surface Mounted Surface Mounted Luminary




Luminaire Group	Surface Mounted
Mounting Type	Surface Mounted
Luminary Color	RAL 9005 - RAL 9016
Housing	Aluminum Injection
Optics	15° 30° 40 °Reflector & Transparent Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1260
Consumption Power	18
Luminaire Efficiency	70 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

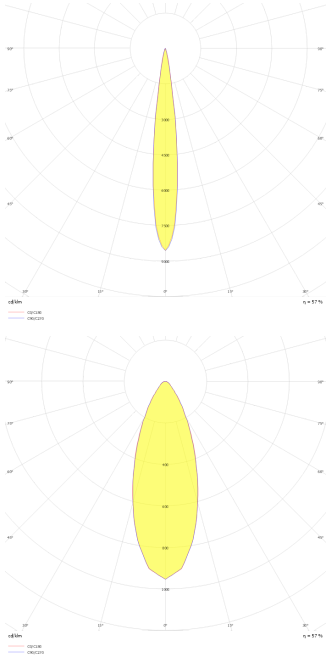


www.atellighting.com

Obi M

OBI 013 020 018S 9040 10 30 SD 40 00

Surface Mounted Surface Mounted Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
15003207	OBI 013 020 018S 9040 10 30 SD 40 00	18	1260	>80	4000	30° Transparent Diffuser	Ø130x200