

Glow HE

GLW 010 078 095S 8040 10 90 LN 66 00



Industrial Luminary




Luminaire Group	Industrial
Luminary Color	RAL 9005
Housing	Electrostatic Powder Coated Aluminum Extrusion Body
Optics	90° Lens
Light Source	LED
Electrical Protection Class	CLASS II
IP	66
IK	09
Operating Temperature	-20°C / +40°C
Luminous Flux	16262
Consumption Power	95
Luminaire Efficiency	171 lm/W
Color Rendering (CRI)	>83
Light Color Temperature (CCT)	4000K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit / Industrial

Technical Drawing



Photometric Curve

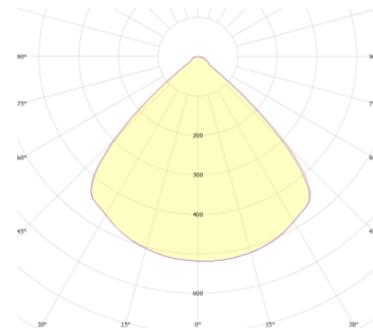

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	GLW 010 078 095S 8040 10 90 LN 66 00	95	16262	>83	4000	90° Lens	539x105x81

www.atellighting.com