

Hexa

Surface Mounted Linear Luminary

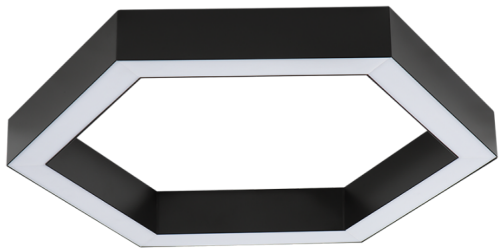


Luminaire Group	Linear
Mounting Type	Surface Mounted
Luminary Color	RAL 9010 - RAL 9005
Housing	Aluminum extruded profile
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	03
Operating Temperature	-20°C / +40°C
Luminous Flux	11232 lm / 5616 lm / 7488 lm
Consumption Power	39 W / 52 W / 78 W
Luminaire Efficiency	144 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	HEX 047 066 039S 8040 10 99 OP 40 00	39	5616	>80	4000	120° Opal Diffuser	660x47x70
	HEX 047 094 052S 8040 10 99 OP 40 00	52	7488	>80	4000	120° Opal Diffuser	94047x70
	HEX 047 122 078S 8040 10 99 OP 40 00	78	11232	>80	4000	120° Opal Diffuser	1220x47x70