
Shorefour S

Surface Mounted Linear Luminary




Luminaire Group	Linear
Mounting Type	Surface Mounted
Luminary Color	RAL 9016 - RAL 9010
Housing	Aluminum extruded profile
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	11232 lm / 14976 lm / 7488 lm
Consumption Power	104 W / 52 W / 78 W
Luminaire Efficiency	144 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing

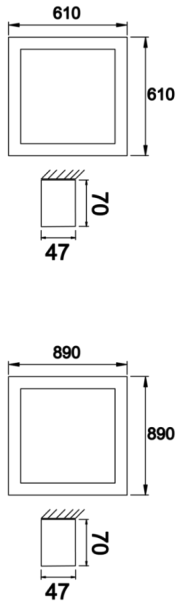


Photometric Curve



Shorefour S

Surface Mounted Linear Luminary



Photometric Curve

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	SFR 061 061 052S 8040 10 99 OP 40 00	52	7488	>80	4000	120° Opal Diffuser	610x610x47x70
	SFR 089 089 078S 8040 10 99 OP 40 00	78	11232	>80	4000	120° Opal Diffuser	890x890x47x70
	SFR 117 117 104S 8040 10 99 OP 40 00	104	14976	>80	4000	120° Opal Diffuser	1170x1170x47x70