ThinPower

Surface Mounted Linear Luminary





Luminaire Group Linear

Mounting TypeSurface MountedLuminary ColorRAL 9010 - RAL 9005HousingAluminum extruded profile

Optics Reflector
Light Source LED
Electrical Protection Class
IP 40
IK 03

Operating Temperature -20°C / +40°C
Luminous Flux 4370 lm
Consumption Power 36 W
Luminaire Efficiency 121 lm/W
Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 >70.000 hours

Option On-Off / Dali / 1-10V / With

Emergency Kit

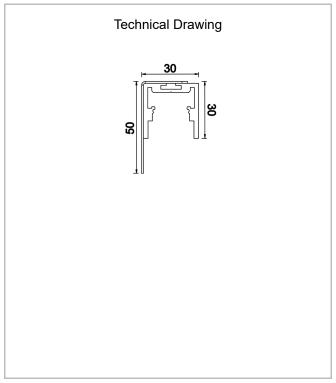

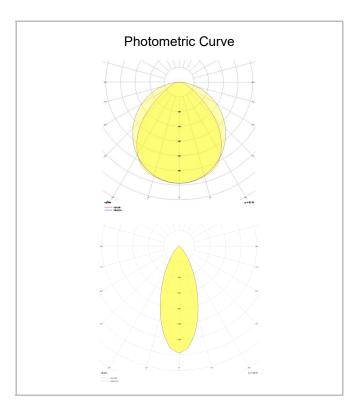

ThinPower



Surface Mounted Linear Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	TPW 030 090 036S 8040 10 40 LN 40 TK	36	4370	>80	4000	40° Opal Diffuser	30x30x1000