
Wina S HR

Recessed Downlight & Spot Luminary




Luminaire Group	Downlight & Spot
Mounting Type	Recessed
Luminary Color	RAL 9005 - RAL 9016
Housing	Aluminum Extrusion
Optics	15° 24° 36° Reflector and Transparent Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	44
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	800 lm
Consumption Power	8 W
Luminaire Efficiency	100 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing




Photometric Curve

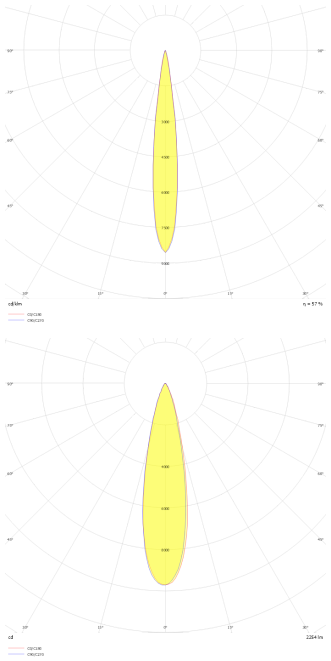

Wina S HR

Recessed Downlight & Spot Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	WIN 008 005 008A 8040 10 15 LN 44 HR	8	800	>80	4000	15° Reflector	Ø83
	WIN 008 005 008A 8040 10 24 LN 44 HR	8	800	>80	4000	24° Reflector	Ø83
	WIN 008 005 008A 8040 10 36 LN 44 HR	8	800	>80	4000	36° Reflektör	Ø83