
Helix

Recessed Downlight & Spot Luminary




Luminaire Group	Downlight & Spot
Mounting Type	Recessed
Luminary Color	RAL 9010 - RAL 9005 - RAL 9006
Housing	Aluminum Injection
Optics	15° 30° 40° Reflector
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	3380 lm / 4500 lm
Consumption Power	26 W / 33 W
Luminaire Efficiency	130 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

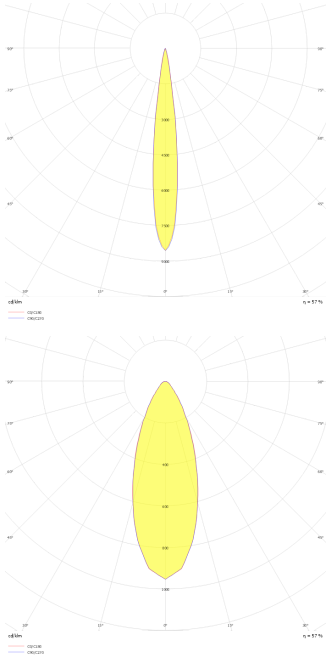


www.atellighting.com

Helix

Recessed Downlight & Spot Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
13002525	HLX 019 013 026A 8040 10 30 SD 20 00	26	3380	>80	4000	30° Reflector	Ø164x128
13002543	HLX 019 013 033A 8040 10 30 SD 20 00	33	4500	>80	4000	30° Reflector	Ø164x128