Dimple Drums

Surface Mounted Surface Mounted Luminary





Luminaire GroupSurface MountedMounting TypeSurface Mounted

Luminary Color RAL 9006 - RAL 9005 - RAL

Housing 9010

Housing DKP Sheet
Optics Opal Diffuser
Light Source LED
Electrical Protection Class CLASS II
IP 40
IK 02

Operating Temperature -20°C / +40°C

Luminous Flux 11750 lm / 4730 lm / 6290 lm

 $\textbf{Consumption Power} \hspace{1.5cm} 109~\text{W} \hspace{0.1cm} / \hspace{0.1cm} 35~\text{W} \hspace{0.1cm} / \hspace{0.1cm} 48~\text{W}$

Luminaire Efficiency 135 lm/W Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 70.000 hours

Option On-Off / Dali / 1-10V / With

Emergency Kit

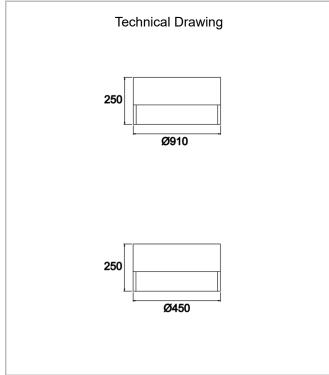


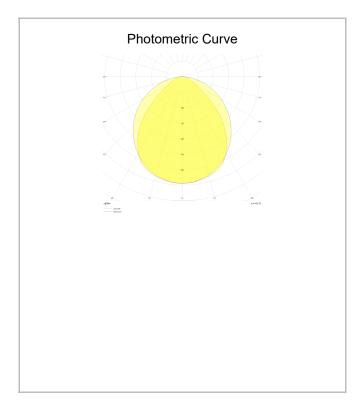


Dimple Drums

Surface Mounted Surface Mounted Luminary



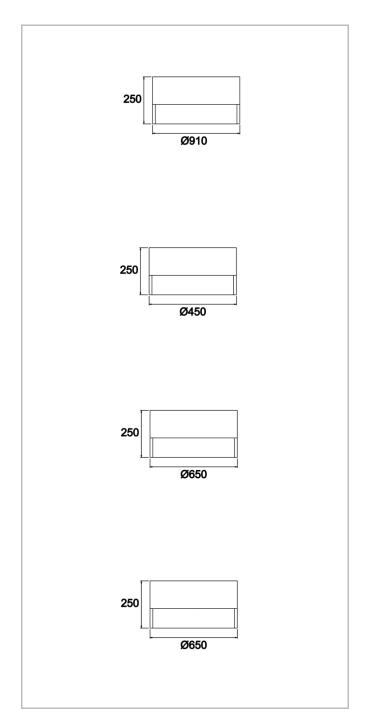

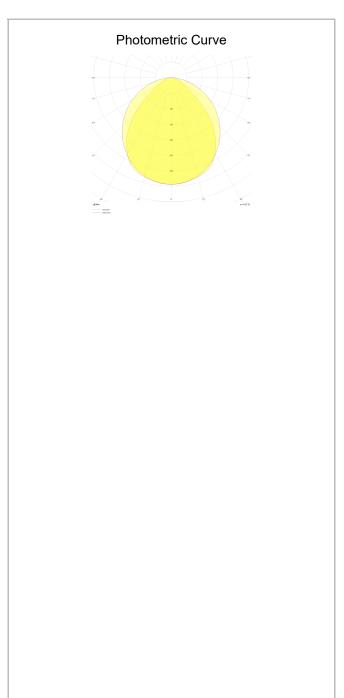

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	DDR 040 025 035S 9040 10 99 OP 40 00	35	4730	>80	4000	120° Diffuser	Ø450x250
	DDR 060 025 048S 9040 10 99 OP 40 00	48	6290	>80	4000	120° Diffuser	Ø650x250

www.atellighting.com

Dimple Drums





SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	DDR 090 025 109S 9040 10 99 OP 40 00	109	11750	>80	4000	120° Diffuser	Ø910x250