Dual R

Surface Mounted Surface Mounted Luminary





Luminaire GroupSurface MountedMounting TypeSurface Mounted

Luminary Color RAL 9006 - RAL 9005 - RAL

Housing DKP Sheet
Optics Opal Diffuser
Light Source LED
Electrical Protection Class CLASS II
IP 40
IK 02

Operating Temperature -20°C / +40°C
Luminous Flux 13260 lm
Consumption Power 102 W
Luminaire Efficiency 130 lm/W
Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 70.000 hours

Option On-Off / Dali / 1-10V / With

Emergency Kit



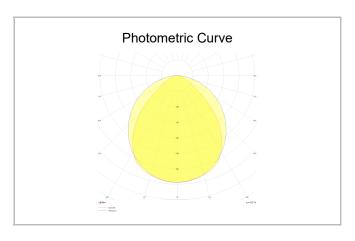

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
		102	13260	>80	4000		1200x600x10
							^