
Hoap

Surface Mounted Surface Mounted Luminary




Luminaire Group	Surface Mounted
Mounting Type	Surface Mounted
Luminary Color	RAL 9005 - RAL 9010 - RAL 9006
Housing	Aluminum Extrusion
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	11570 lm / 6010 lm / 7730 lm / 9650 lm
Consumption Power	38 W / 52 W / 65 W / 78 W
Luminaire Efficiency	158 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing




Photometric Curve




www.atellighting.com

Hoap

Surface Mounted Surface Mounted Luminary

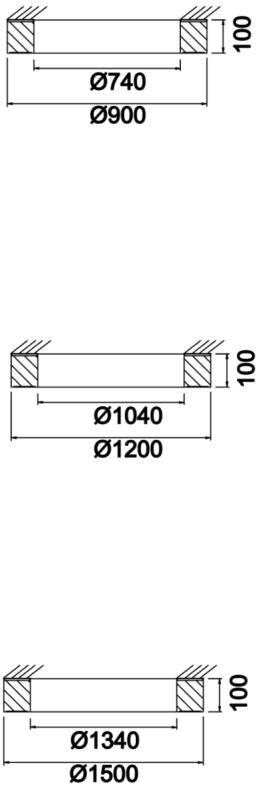

Photometric Curve



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	HOP 060 008 038S 8040 10 99 OP 40 00	38	6010	>80	4000	120° Diffuser	Ø600x100
	HOP 090 008 052S 8040 10 99 OP 40 00	52	7730	>80	4000	120° Diffuser	Ø900x100mm
	HOP 120 008 065S 8040 10 99 OP 20 00	65	9650	>80	4000	120° Diffuser	1200x100
	HOP 150 008 078S 8040 10 99 OP 40 00	78	11570	>80	4000	120° Diffuser	Ø1500x100