Sharp Surface mounted

Surface Mounted Surface Mounted Luminary





Luminaire GroupSurface MountedMounting TypeSurface Mounted

Luminary Color RAL 9005 - RAL 9006 - RAL

Housing 9010

Housing DKP Sheet
Optics With 50° Lens
Light Source LED
Electrical Protection Class CLASS II
IP 20

Operating Temperature -20°C / +40°C
Luminous Flux 3200 lm
Consumption Power 40 W
Luminaire Efficiency 90 lm/W
Color Rendering (CRI) >80

IK

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

02

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 100.000 hours

Option On-Off / Dali / 1-10V / With

Emergency Kit



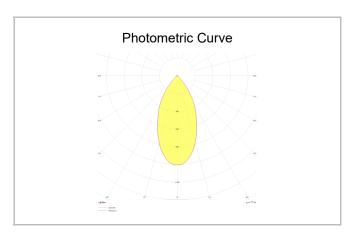

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	SHP 030 005 021S 8040 10 50 LN 40 00	40	3200	>80	4000	50° Lens	293,5x51,5x7 8,5