



Finger



Pendant Pendant Luminary



Luminaire Group	Pendant
Mounting Type	Pendant
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	Aluminum
Optics	MR16 / GU10
Light Source	LedAmpul
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	3100 lm
Consumption Power	25 W
Luminaire Efficiency	lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
Option	On-Off / Dali / 1-10V / With Emergency Kit

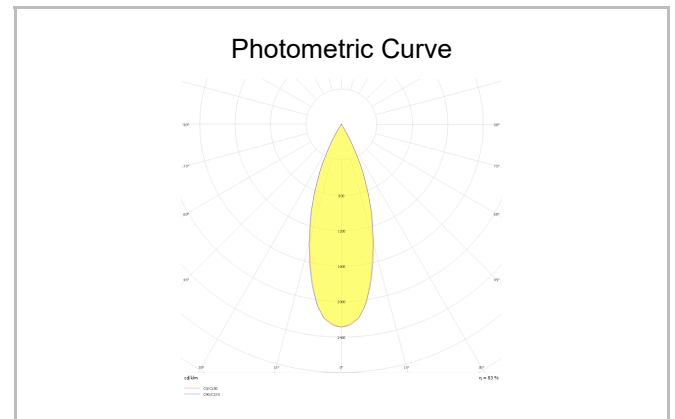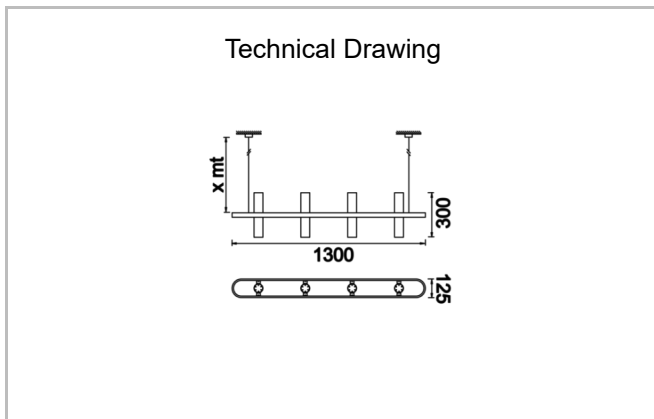

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	FIN 130 030 020P 0040 10 36 AP 20 00	25	3100	>80	4000	36° Led Ampul	1300x125x300