

Sisa S & M


Surface Mounted Wall Mount Luminary

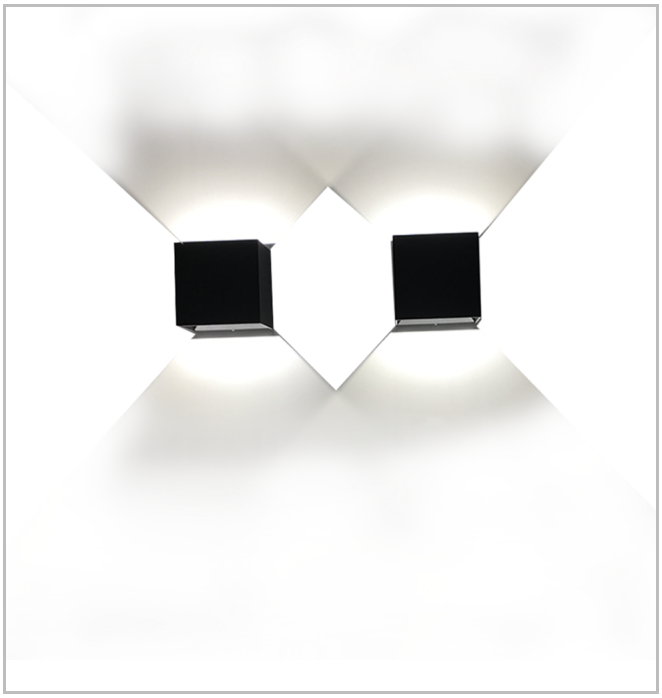


Luminaire Group	Wall Mount
Mounting Type	Surface Mounted
Housing	DKP Sheet
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
Operating Temperature	-20°C / +40°C
Luminous Flux	520 lm / 780 lm
Consumption Power	4 W / 6 W
Luminaire Efficiency	130 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing





Photometric Curve



www.atellighting.com

Sisa S & M

Surface Mounted Wall Mount Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	SIS 010 010 004D 8040 10 99 OP 20 00	4	520	>80	4000	120° Opal Diffuser	120x120x
	SIS 012 012 006D 8040 10 99 OP 20 00	6	780	>80	4000	120° Opal Diffuser	120x120x