Sisa S & M

Surface Mounted Wall Mount Luminary





Luminaire GroupWall MountMounting TypeSurface MountedHousingDKP SheetOpticsOpal DiffuserLight SourceLEDElectrical Protection ClassCLASS IIIP20

Operating Temperature -20°C / +40°C
Luminous Flux 520 lm / 780 lm
Consumption Power 4 W / 6 W
Luminaire Efficiency 130 lm/W
Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 >70.000 hours


Option On-Off / Dali / 1-10V / With

Emergency Kit

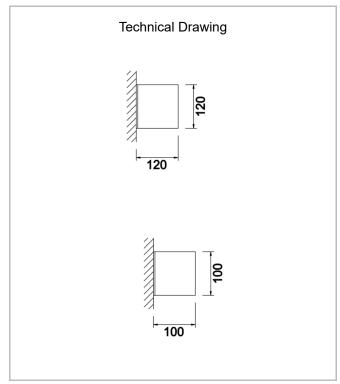

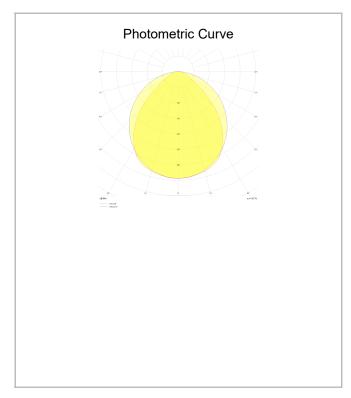

Sisa S & M





| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|-----------------------|-----|---------|-----------------------|-----------------|
| | SIS 010 010 004D 8040 10 99 OP 20 00 | 4 | 520 | >80 | 4000 | 120° Opal Diffuser | 120x120x |
| | SIS 012 012 006D 8040 10 99 OP 20 00 | 6 | 780 | >80 | 4000 | 120° Opal Diffuser | 120x120x |