
Absorb


Pendant Acoustic Solutions Luminary




Luminaire Group	Acoustic Solutions
Mounting Type	Pendant
Housing	Acoustic Panel
Optics	34° 48° Reflector / Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1925 lm / 2125 lm
Consumption Power	22 W / 25 W
Luminaire Efficiency	87,5 lm/W - 85 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing





Photometric Curve

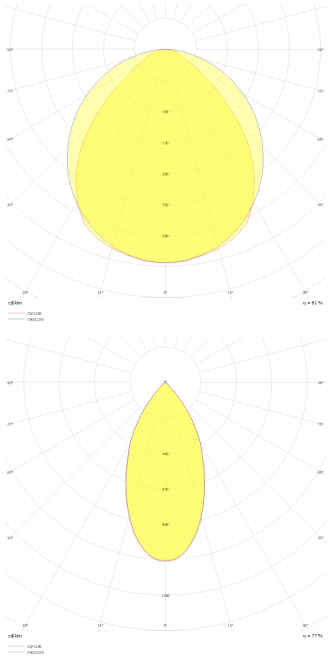

Absorb

Pendant Acoustic Solutions Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	ABS 180 180 022A 8040 10 48 RF 20 00 FLS	22	1925	>80	4000	48° Reflector	1800X1800
	ABS 180 180 025A 8040 10 48 RF 20 00 OFL	25	2125	>80	4000	120° Opal Diffuser	1800X1800