
Kobe 4 & 8

Track Lighting Luminary




Luminaire Group	Track Lighting
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	Aluminum Injection
Optics	12° 25° 40° Lens
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1920 lm / 3840 lm
Consumption Power	24 W / 48 W
Luminaire Efficiency	80 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V

Technical Drawing

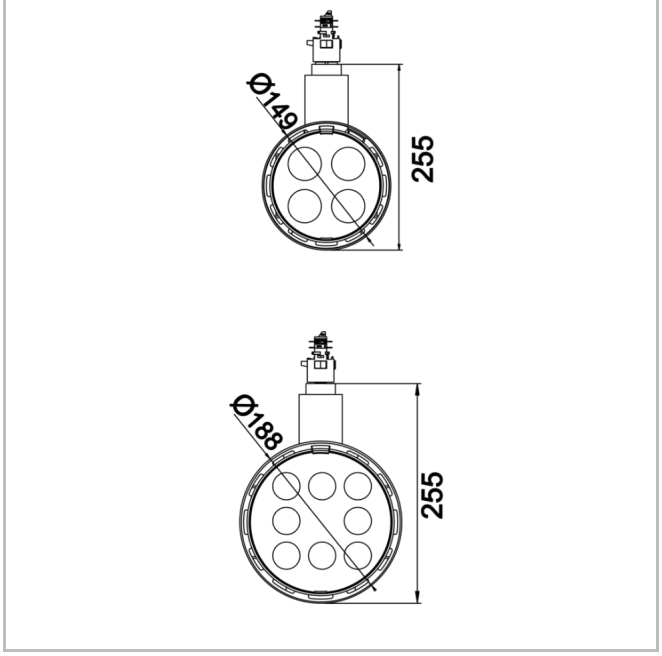


Photometric Curve

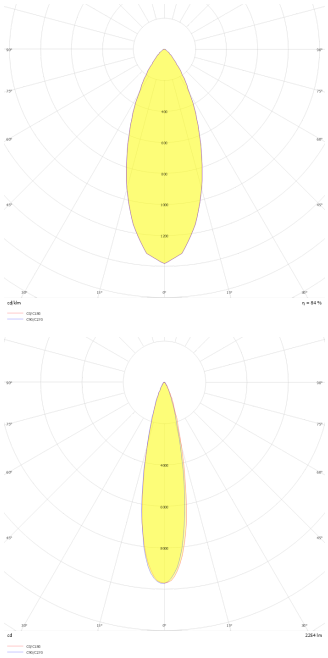

Kobe 4 & 8

Track Lighting Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	KOB 015 025 024W 8040 10 12 LN 20 00	24	1920	>80	4000	12° Lens	Ø149x255
	KOB 015 025 024W 8040 10 25 LN 20 00	24	1920	>80	4000	25° Lens	Ø149x255
	KOB 015 025 024W 8040 10 40 LN 20 00	24	1920	>80	4000	40° Lens	Ø149x255
	KOB 018 025 048W 8040 10 12 LN 20 00	48	3840	>80	4000	12° Lens	Ø188x255
	KOB 018 025 048W 8040 10 25 LN 20 00	48	3840	>80	4000	25° Lens	Ø188x255
	KOB 018 025 048W 8040 10 40 LN 20 00	48	3840	>80	4000	40° Lens	Ø188x255