

Shackle




Track Lighting Luminary






Luminaire Group	Track Lighting
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	Aluminum
Optics	19° 30° 55° Reflector and Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1040 lm / 1440 lm / 2080 lm
Consumption Power	13 W / 18 W / 26 W
Luminaire Efficiency	80 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V

Technical Drawing



Photometric Curve

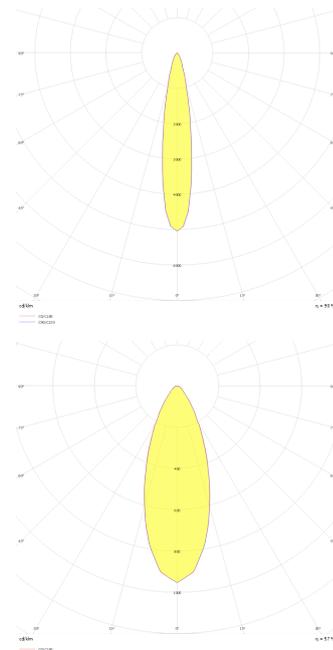

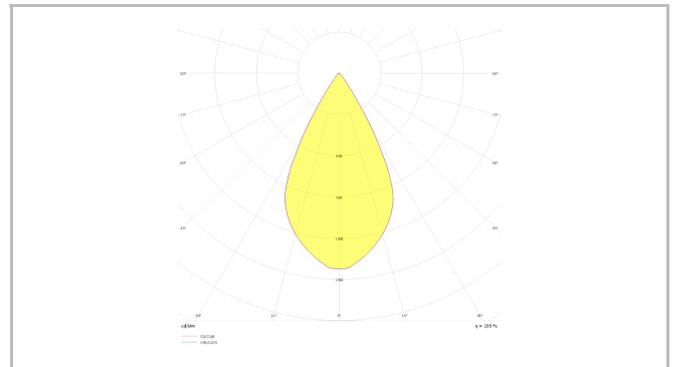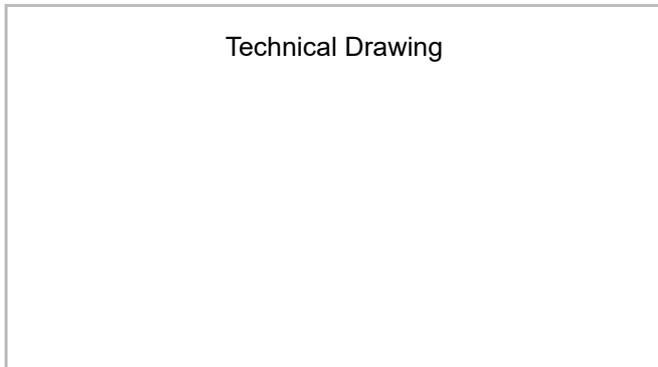

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	SHA 013 015 013W 8040 10 19 CA 20 00	13	1040	>80	4000	19° Reflector	Ø133x145
	SHA 013 015 013W 8040 10 30 CA 20 00	18	1440	>80	4000	30° Reflector	Ø133x145
	SHA 013 015 013W 8040 10 55 CA 20 00	26	2080	>80	4000	55° Reflector	Ø133x145
	SHA 013 015 018W 8040 10 19 CA 20 00	13	1040	>80	4000	19° Reflector	Ø133x145
	SHA 013 015 018W 8040 10 30 CA 20 00	18	1440	>80	4000	30° Reflector	Ø133x145
	SHA 013 015 018W 8040 10 55 CA 20 00	26	2080	>80	4000	55° Reflector	Ø133x145
	SHA 013 015 026W 8040 10 19 CA 20 00	13	1040	>80	4000	30° Reflector	Ø133x145
	SHA 013 015 026W 8040 10 30 CA 20 00	18	1440	>80	4000	30° Reflector	Ø133x145
	SHA 013 015 026W 8040 10 55 CA 20 00	26	2080	>80	4000	55° Reflector	Ø133x145