

# Margarita S




Floor Facade & Landscape Luminary






<b>Luminaire Group</b>	Facade & Landscape
<b>Mounting Type</b>	Floor
<b>Luminaire Color</b>	RAL 9005 - RAL 9016
<b>Housing</b>	Aluminum Extrusion
<b>Optics</b>	15° 40° 90° Lens
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	65
<b>IK</b>	08
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	1040 lm / 1520 lm / 2000 lm
<b>Consumption Power</b>	13 W / 19 W / 25 W
<b>Luminaire Efficiency</b>	80 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours

Technical Drawing



Photometric Curve

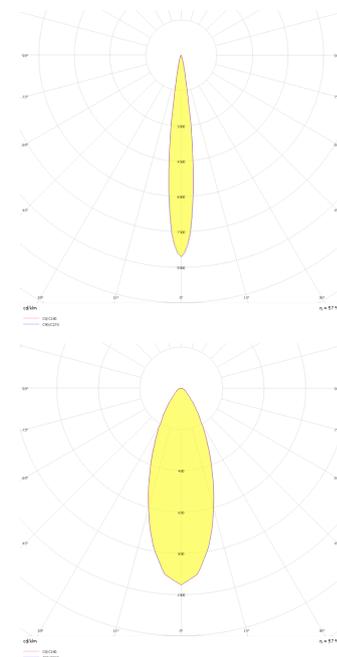

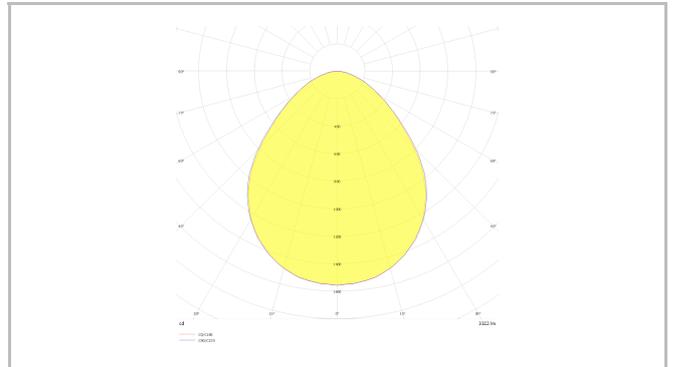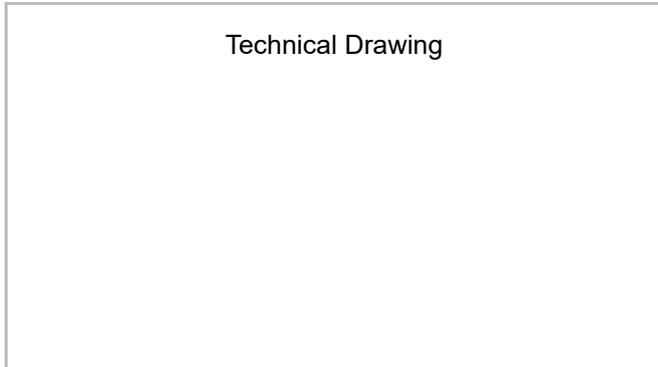

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	MAR 011 009 013K 8030 10 15 LN 65 00	13	1040	>80	4000	15° Lens	Ø119
	MAR 011 009 013K 8030 10 40 LN 65 00	13	1040	>80	4000	40° Lens	Ø119
	MAR 011 009 013K 8030 10 90 LN 65 00	13	1040	>80	4000	90° Lens	Ø119
	MAR 011 009 019K 8030 10 15 LN 65 00	19	1520	>80	4000	15° Lens	Ø119
	MAR 011 009 019K 8030 10 40 LN 65 00	19	1520	>80	4000	40° Lens	Ø119
	MAR 011 009 019K 8030 10 90 LN 65 00	19	1520	>80	4000	90° Lens	Ø119
	MAR 011 009 025K 8030 10 15 LN 65 00	25	2000	>80	4000	15° Lens	Ø119
	MAR 011 009 025K 8030 10 40 LN 65 00	25	2000	>80	4000	40° Lens	Ø119
	MAR 011 009 025K 8030 10 90 LN 65 00	25	2000	>80	4000	90° Lens	Ø119