
Margarita S

Floor Facade & Landscape Luminary




Luminaire Group	Facade & Landscape
Mounting Type	Floor
Luminary Color	RAL 9005 - RAL 9016
Housing	Aluminum Extrusion
Optics	15° 40° 90° Lens
Light Source	LED
Electrical Protection Class	CLASS II
IP	65
IK	08
Operating Temperature	-20°C / +40°C
Luminous Flux	1040 lm / 1520 lm / 2000 lm
Consumption Power	13 W / 19 W / 25 W
Luminaire Efficiency	80 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

Technical Drawing



Photometric Curve

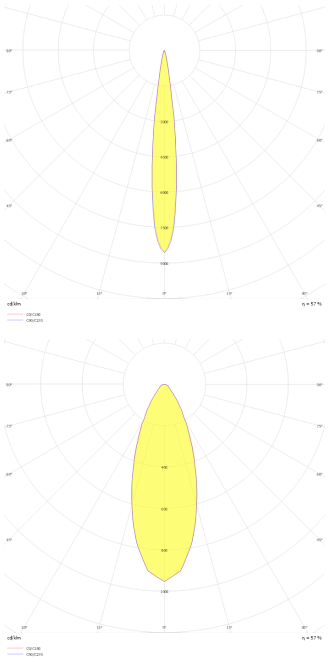


www.atellighting.com

Margarita S

Floor Facade & Landscape Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	MAR 011 009 013K 8030 10 15 LN 65 00	13	1040	>80	4000	15° Lens	Ø119
	MAR 011 009 013K 8030 10 40 LN 65 00	13	1040	>80	4000	40° Lens	Ø119
	MAR 011 009 013K 8030 10 90 LN 65 00	13	1040	>80	4000	90° Lens	Ø119
	MAR 011 009 019K 8030 10 15 LN 65 00	19	1520	>80	4000	15° Lens	Ø119
	MAR 011 009 019K 8030 10 40 LN 65 00	19	1520	>80	4000	40° Lens	Ø119
	MAR 011 009 019K 8030 10 90 LN 65 00	19	1520	>80	4000	90° Lens	Ø119
	MAR 011 009 025K 8030 10 15 LN 65 00	25	2000	>80	4000	15° Lens	Ø119
	MAR 011 009 025K 8030 10 40 LN 65 00	25	2000	>80	4000	40° Lens	Ø119
	MAR 011 009 025K 8030 10 90 LN 65 00	25	2000	>80	4000	90° Lens	Ø119