
# Glow 2X2

Industrial Luminary




| | |
|---|---|
| **Luminaire Group** | Industrial |
| **Luminary Color** | RAL 9005 |
| **Housing** | Electrostatic Powder Coated Aluminum Extrusion Body |
| **Optics** | 60º / 90° / 30x70° Lens |
| **Light Source** | LED |
| **Electrical Protection Class** | CLASS II |
| **IP** | 66 |
| **IK** | 09 |
| **Operating Temperature** | -20°C / +40°C |
| **Luminous Flux** | 29751 lm |
| **Consumption Power** | 194 W |
| **Luminaire Efficiency** | 153,36 lm/W |
| **Color Rendering (CRI)** | >80 |
| **Light Color Temperature (CCT)** | 2700K / 3000K / 4000K / 6500K |
| **Color Tolerance** | < 3 SDCM |
| **Driver Type** | On/Off |
| **Driver Brand** | Tridonic |
| **LED Brand** | Samsung |
| **Input Voltage / Frequency** | 220-240 V AC 50/60 Hz |
| **Power Factor** | >0.9 |
| **Surge** | 1kV |
| **THD (AKIM)** | >%20 |
| **LED life** | 100.000 hours |
| **Option** | Dali / 1-10V / With Emergency Kit / Industrial / Tempered Glass |

## Technical Drawing




## Photometric Curve

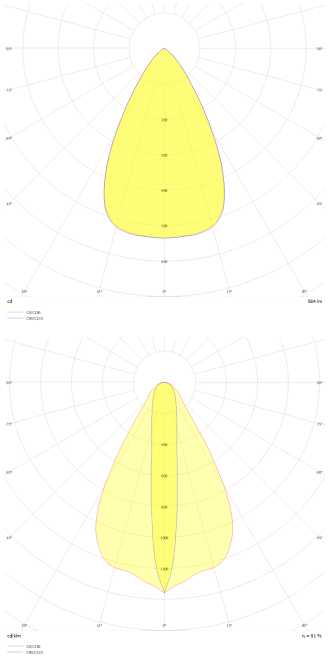


www.atellighting.com

# Glow 2X2

Industrial Luminary

Technical Drawing



| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|---|---|---|---|---|---|---|---|
| | GLW 020 054 194S 8040 10 02 LN 66 00 | 194 | 29751 | >80 | 4000 | 30°x70° Lens | 539x213x81 |
| | GLW 020 054 194S 8040 10 90 LN 66 00 | 194 | 29751 | >80 | 4000 | 90° Lens | 539x213x81 |
| | GLW 020 054 194S 8040 10 60 LN 66 00 | 194 | 29751 | >80 | 4000 | 60° Lens | 539x213x81 |