

Glow 3X




Industrial Luminary




Luminaire Group	Industrial
Luminary Color	RAL 9005
Housing	Electrostatic Powder Coated Aluminum Extrusion Body
Optics	60° / 90° / 30x70° Lens & Tempered Glass
Light Source	LED
Electrical Protection Class	CLASS II
IP	66
IK	09
Operating Temperature	-20°C / +40°C
Luminous Flux	22237 lm
Consumption Power	145 W
Luminaire Efficiency	153,36 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K / 3000K / 4000K / 6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit / Industrial /Temperli Cam

Technical Drawing



Photometric Curve





www.atellighting.com

Glow 3X



Industrial Luminary

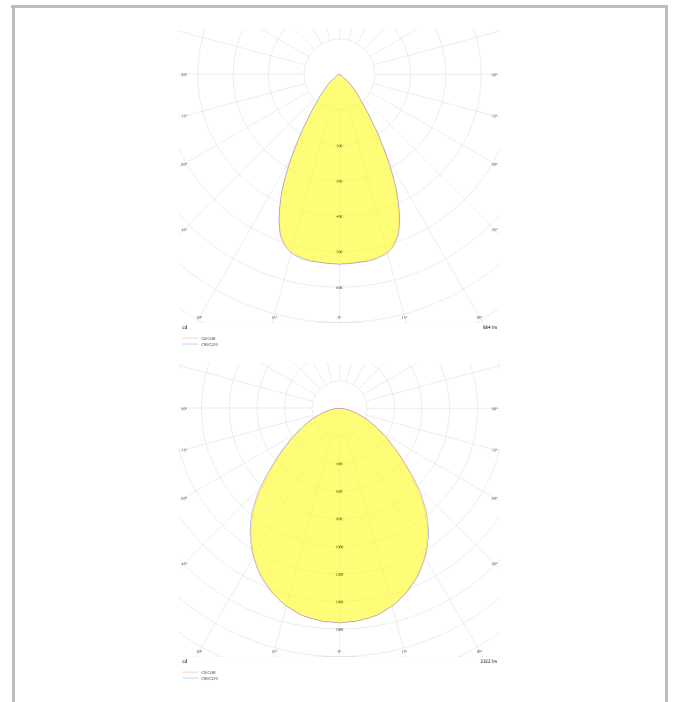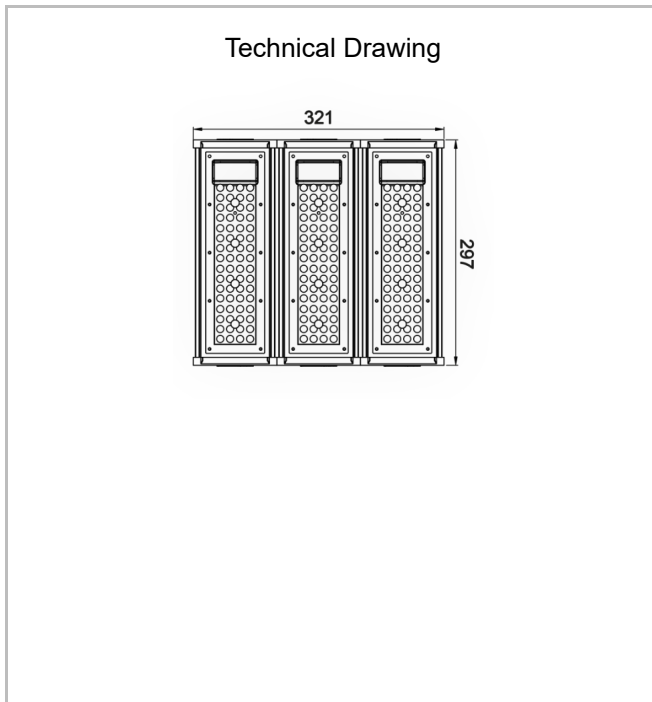

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	GLW 010 078 145S 8040 10 02 LN 66 00	145	22237	>80	4000	30°x70° Lens	293x321x81
	GLW 010 078 145S 8040 10 90 LN 66 00	145	22237	>80	4000	90° Lens	293x321x81
	GLW 010 078 145S 8040 10 60 LN 66 00	145	22237	>80	4000	60° Lens	293x321x81