


## Surface Mounted Wall Mount Luminaire




<b>Luminaire Group</b>	Wall Mount
<b>Mounting Type</b>	Surface Mounted
<b>Housing</b>	DKP Sheet
<b>Optics</b>	Reflector & Glass
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	65
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	1260 lm / 630 lm
<b>Consumption Power</b>	14 W / 7 W
<b>Luminaire Efficiency</b>	90 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V


Technical Drawing



Photometric Curve

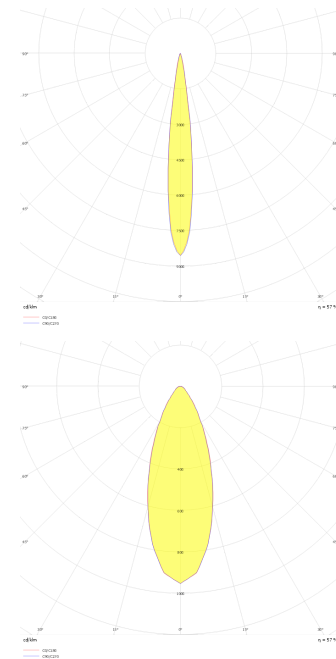

Surface Mounted Wall Mount Luminary

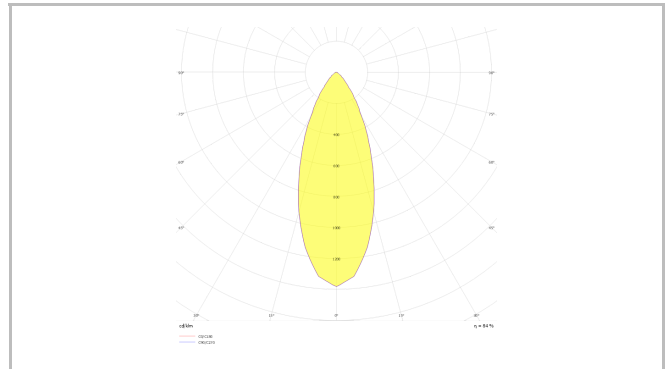

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
		7	630	>80	4000		Ø60x230mm □
	VIA 006 023 007D 8040 10 30 CA 65 00	7	630	>80	4000	30° Reflector	Ø60x230mm □
	VIA 006 023 007D 8040 10 40 CA 65 00	7	630	>80	4000	40° Reflector	Ø60x230mm □
18100021	VIA 006 023 014D 8040 10 15 CA 65 00	14	1260	>80	4000	15° Reflector	Ø60x230mm □
18100057	VIA 006 023 014D 8040 10 30 CA 65 00	14	1260	>80	4000	30° Reflector	Ø60x230mm □
18100093	VIA 006 023 014D 8040 10 40 CA 65 00	14	1260	>80	4000	40° Reflector	Ø60x230mm □