## **Panlite**

## Surface Mounted Surface Mounted Luminary





**Luminaire Group** Surface Mounted **Mounting Type** Surface Mounted **Luminary Color RAL 9003 DKP Sheet** Housing **Optics** Opal Diffuser **Light Source** LED **Electrical Protection Class** CLASS II 40 02

Operating Temperature -20°C / +40°C
Luminous Flux 4560 lm
Consumption Power 38 W
Luminaire Efficiency 125 lm/W
Color Rendering (CRI) >80

Light Color Temperature (CCT) 2700K/3000K/4000K/6500K

Color Tolerance< 3 SDCM</th>Driver TypeOn/OffDriver BrandTridonicLED BrandSamsung

Input Voltage / Frequency 220-240 V AC 50/60 Hz

 Power Factor
 >0.9


 Surge
 1kV


 THD (AKIM)
 >%20

 LED life
 >70.000 hours

Option On-Off / Dali / 1-10V / With

**Emergency Kit** 

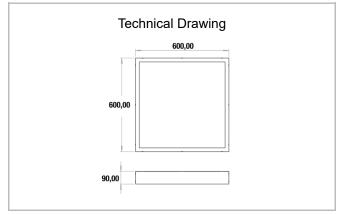

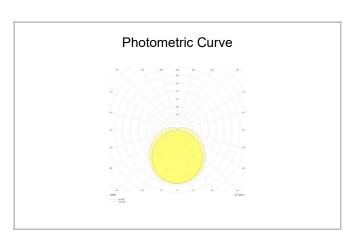

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	PNL 060 060 038S 8040 10 99 OP 40 00	38	4560	>80	4000	120° Opal Diffuser	600x600