

Gudi S




Track Lighting Luminary




Luminaire Group	Track Lighting
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	DKP Sheet
Optics	15° 30° 40° Reflector
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1365 lm / 1800 lm
Consumption Power	13 W / 18 W
Luminaire Efficiency	105 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

Technical Drawing



Photometric Curve

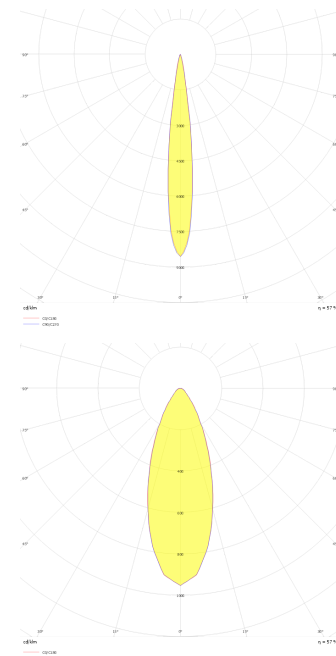


Gudi S



Track Lighting Luminary

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
17000013□	GUD 008 013 013W 8040 10 15 CA 20 00	13	1365	>80	4000	15° Reflector	80x135
17000031□	GUD 008 013 013W 8040 10 30 CA 20 00	13	1365	>80	4000	30° Reflector	80x135
17000049□	GUD 008 013 013W 8040 10 40 CA 20 00	13	1365	>80	4000	40° Reflector	80x135
17000067□	GUD 008 013 018W 8040 10 15 CA 20 00	18	1800	>80	4000	15° Reflector	80x135
17000085	GUD 008 013 018W 8040 10 30 CA 20 00	18	1800	>80	4000	30° Reflector	80x135
17000103□	GUD 008 013 018W 8040 10 40 CA 20 00	18	1800	>80	4000	40° Reflector	80x135