

Gudi S




Track Lighting Luminary






Luminaire Group	Track Lighting
Luminary Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	DKP Sheet
Optics	15° 30° 40° Reflector
Light Source	LED
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	1365 lm / 1800 lm
Consumption Power	13 W / 18 W
Luminaire Efficiency	105 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

Technical Drawing



Photometric Curve

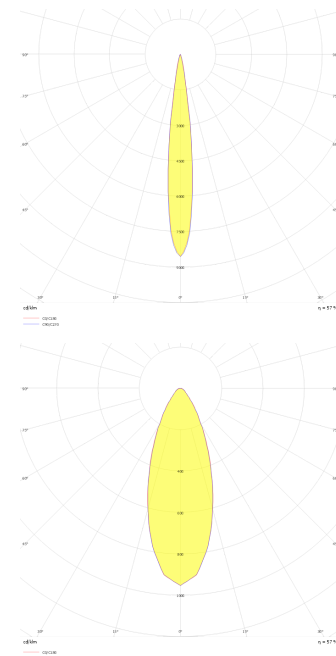

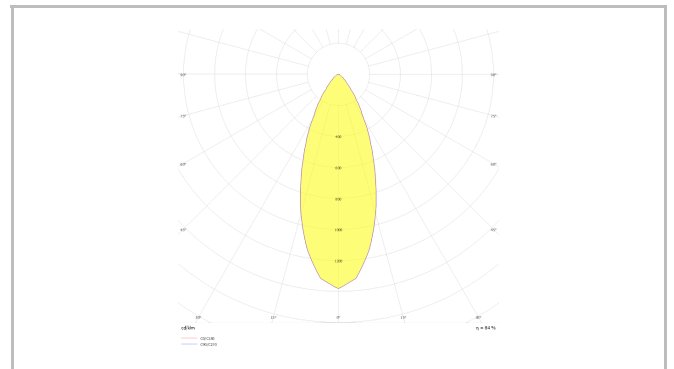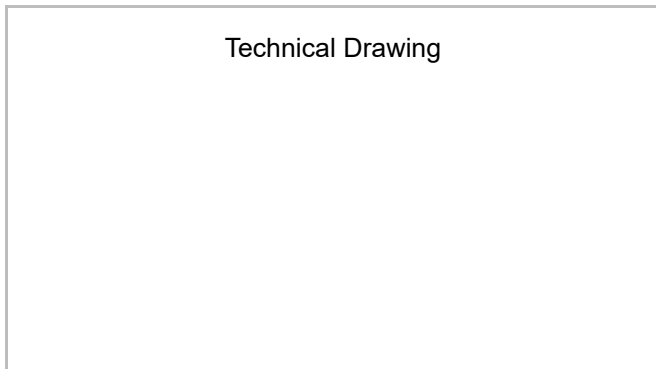

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
17000013	GUD 008 013 013W 8040 10 15 CA 20 00	13	1365	>80	4000	15° Reflector	80x135
17000031	GUD 008 013 013W 8040 10 30 CA 20 00	13	1365	>80	4000	30° Reflector	80x135
17000049	GUD 008 013 013W 8040 10 40 CA 20 00	13	1365	>80	4000	40° Reflector	80x135
17000067	GUD 008 013 018W 8040 10 15 CA 20 00	18	1800	>80	4000	15° Reflector	80x135
17000085	GUD 008 013 018W 8040 10 30 CA 20 00	18	1800	>80	4000	30° Reflector	80x135
17000103	GUD 008 013 018W 8040 10 40 CA 20 00	18	1800	>80	4000	40° Reflector	80x135